


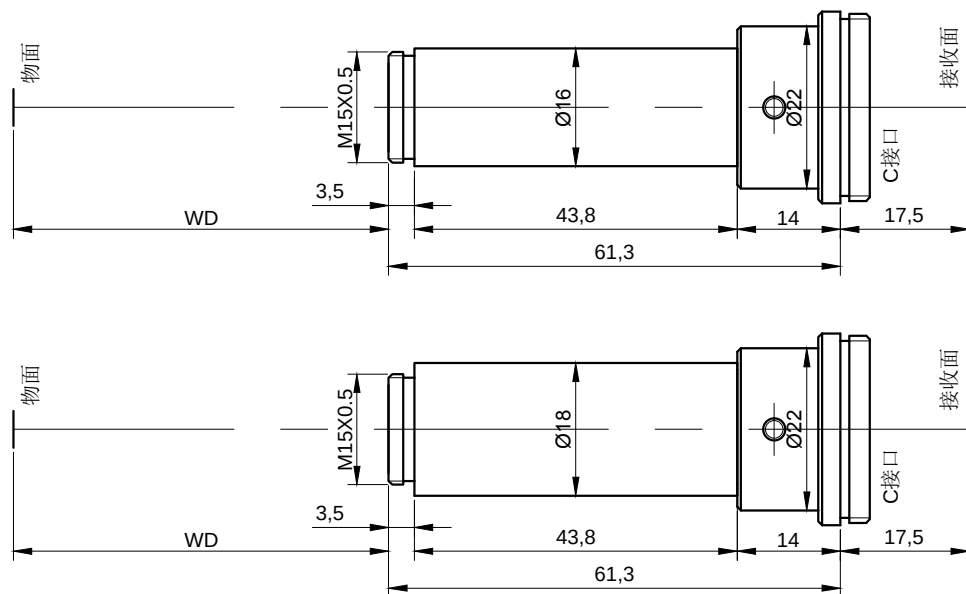

型号	倍数	工作距	景深	数值孔径	分辨率	F/#	畸变%	接口	CCD
I0.3X230NM	0.3	230	11.11	0.012	0.028	12.5	0.15	C	2/3'
I0.3X300NM	0.3	300	10.26	0.013	0.026	11.5	0.2	C	1/2'
I0.5X132NM	0.5	132	2.67	0.030	0.011	8.3	0.01	C	1/2'
I0.5X137NM	0.5	137	2.67	0.030	0.011	8.3	0.02	C	1/2'
I0.5X205NM	0.5	205	4.21	0.019	0.018	13.2	0.28	C	1/2'
I0.5X260NM	0.5	260	5.33	0.015	0.022	16.7	0.4	C	2/3'
I0.5X65NM	0.5	65	2.50	0.032	0.010	7.8	0.36	C	1/2'
I0.6X120NM	0.6	120	3.70	0.018	0.019	16.7	0.1	C	1/2'
I0.6X195NM	0.6	195	3.33	0.020	0.017	15.0	0.2	C	1/2'
I0.8X130NM	0.8	130	2.17	0.023	0.015	17.4	0.27	C	1/2'
I0.8X130NM	0.8	130	2.17	0.023	0.015	17.4	0.27	C	1/2'
I0.8X85NM	0.8	85	1.32	0.038	0.009	10.5	0.5	C	1/2'
I0.8X85NM	0.8	85	1.72	0.029	0.012	13.8	0.5	C	1/2'
I1.5X70NM	1.5	70	0.53	0.050	0.007	15.0	0.04	C	1/2'

设计		标准		图样标记	重量	比例	www.taopt.com		
校对		审定				1:1			
审核		批准					IN_T61.3		